

June 1996

# Rotary Gauge Instructions Types J31 and J32

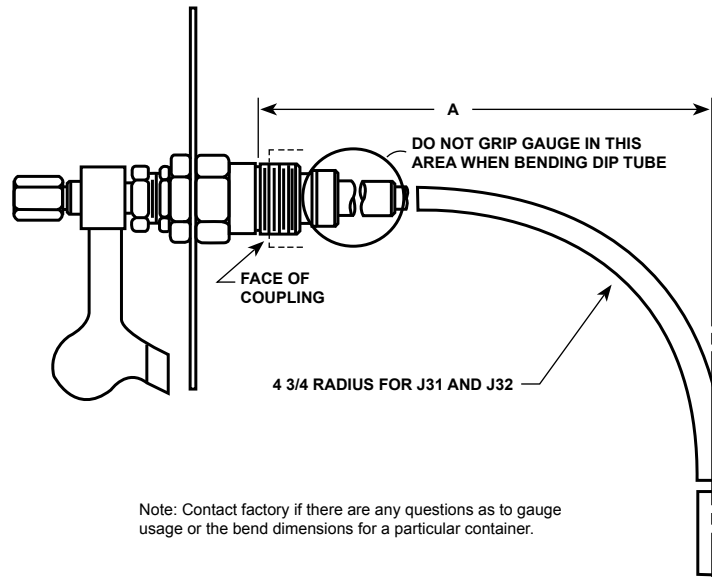


Figure 1. Types J31 and J32



## WARNING

Install, use, and maintain per Fisher instructions and all applicable federal state, local laws and codes, and NFPA Pamphlet 58 or ANSI K61. 1. Periodic inspection and maintenance is essential.

The J31 and J32 rotary gauges can be used on both stationary and mobile installations. One mobile installations hangers should be used with these units to support the horizontal length of the dip tube.



## CAUTION

Do not make the "A" dimension, see illustration on reverse side, of the gauge any longer than is needed for the dip tube to reach the bottom of the container. Excessively long horizontal lengths produce stress on the gauge near the face of the coupling.

If the gauge is ordered with a straight dip tube, care must be taken when bending the tube to the particular container in installation. Do not place the encircled area of the gauge, see illustration, in a vise because this can weaken the gauge internally. Instead grip the dip tube portion of the gauge when bending the dip tube.



# Types J31 and J32

---

Fisher and Fisher Regulators are marks owned by Fisher Controls International, LLC. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

*The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, expressed or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.*

Fisher does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Fisher product remains solely with the purchaser.

## **Emerson Process Management**

### **Fisher Controls International, LLC.**

P.O. Box 8004

McKinney, Texas 75070, USA

Telephone: 1 (800) 588-5853

Telephone: 1 (469) 293-4201