


3-1/4" F. Acme x 2" MNPT Filler Coupling

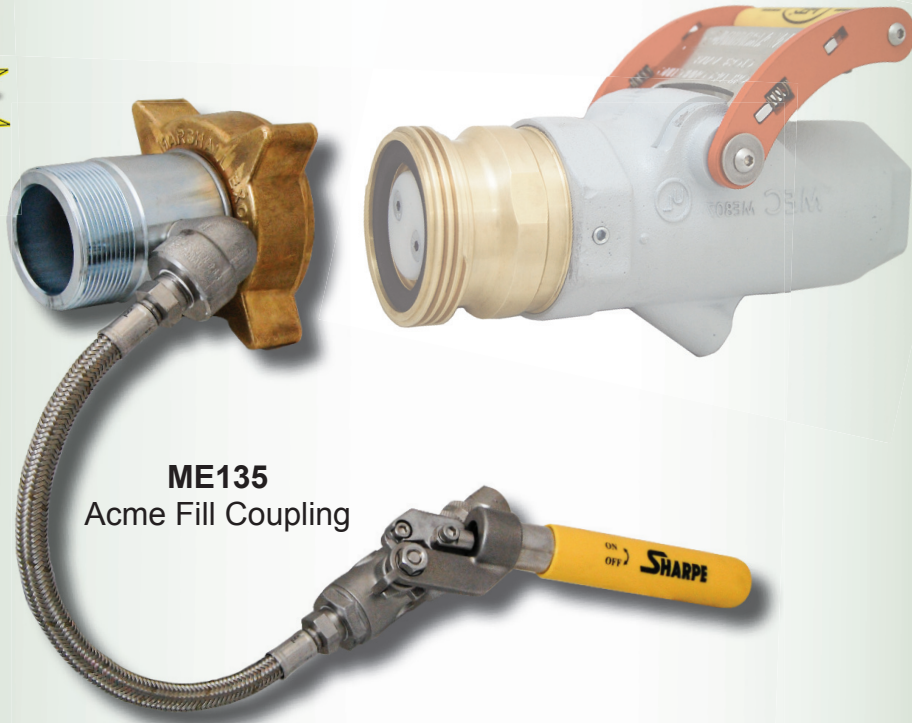

ME135
Acme Fill Coupling

APPLICATION:

Intended for use in conjunction with our new ME807-16 in applications where our ME806-16 Turbo-Flo LE Valve is not practical due to space or lack of fixed loading / unloading lines. The ME135 allows for normal use of on board passive shutdown hoses and traditional product "blow down" discharge lines in instances where LE hose end valves are not available or practical. Acme connection comes fully assembled with a stainless steel hose, fittings, self-closing ball valve and quick disconnect for easy installation.

Note: Quick Disconnect is 3/8" FNPT

3-1/4" F. Acme x 2" MNPT Filler Coupling					
Part No.	Description	F. Acme	MNPT	LPG	NH3
ME135	Filler Coupling - Brass Nut/Steel Stem & S.S. Hose Assembly	3-1/4"	2"	Yes	No
ME135S	Filler Coupling - Steel Nut/Steel Stem & S.S. Hose Assembly	3-1/4"	2"	Yes	Yes