


MANUFACTURED BY PGI INTERNATIONAL

Installation of Swivel Connector

August 2002

Form FVC 057 - Rev. 1

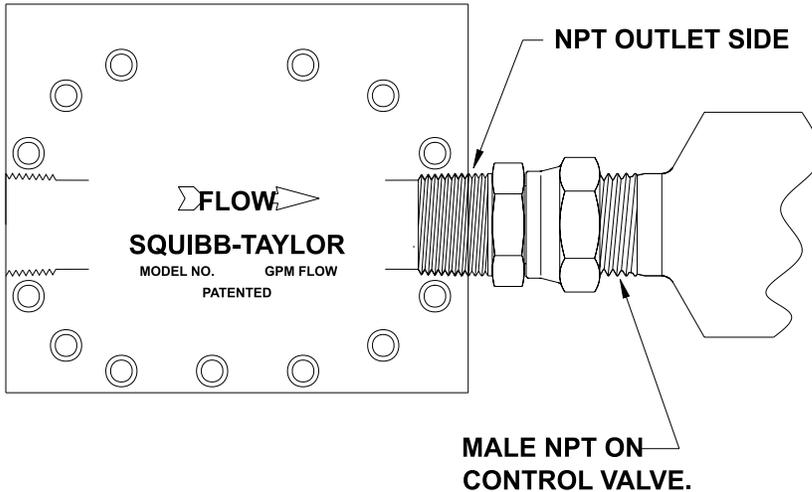

A Swivel Connector is provided for installation into the Outlet Side of the Kontrol-Flo Meter Body. Check Flow Arrow on the cover for proper orientation. Using Teflon tape or pipe dope, install the male pipe thread into the Meter Body. Do not over tighten.

Note: Do not use excessive amounts of pipe dope that could become lodged in any moving parts.

Install the male pipe thread of the Control Valve and Motor Box Assembly into the swivel side of the connector.

CAUTION: The main purpose of using the Swivel Connector is that it provides a union type connection that is easily disconnected when and if maintenance is required on either the Meter or the Control Valve. The threads on both the Meter and the Control Valve are aluminum, and are subject to galling if over-tightened and then later removed. Damage to the threads of both parts will be eliminated if the connector is used.