

KRUG VAPOR COMPRESSOR

TOPS FOR EFFICIENT TRANSFER
OF
BUTANE, PROPANE, OR ANHYDROUS AMMONIA

- Economical way in which to transfer, evacuate or purge tanks.
- Environmentally friendly, once the connections are made it is a closed loop system with little chance of leaks.
- Save your truck pump from damages use this unit for evacuating tanks.
- Capacity 19 to 55 GPM depending on piping.



H50LP (LP POWERED)

Engine Spec's


- 4hp overhead valve Lauson engine.
- Spark arresting muffler.
- Shielded electronic ignition.
- On-Off switch.
- Available with Gasoline or LP carburetion.

Compressor Spec's

- 2 cylinder 10.7 cu. in. displacement.
- Suction port 1/2" FNPT.
- Discharge port 1/2" FNPT with pressure gauge.
- 1000 rpm.



H50GH (GAS POWERED)

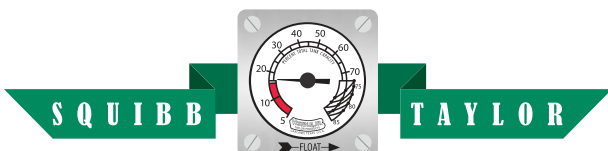

10480 Shady Trail Suite # 106 Dallas, TX 75220
Toll Free 800.345.8105 Phone 214.357.4591
Fax 214.357.5923 E-Mail: squibbweb@squibbtaylor.com
www.squibbtaylor.com